



Smart Door Lock User Manual

PP8200 Pro



Special Attention:

1. The key only helps if you keep it outside the locked door. An ideal place to store a copy is your office or nearby relative house.
2. Always use recognized brands alkaline battery for good performance and to avoid leakages. Do not use re-chargeable NiMH and NiCD battery due to the lower working voltage
3. Please study this manual carefully before installation

1) Introduction

1.1 Specification

Model no	PP8200 Pro	Fingerprint Registration	100
Material	Titanium Alloy, ABS	Card Registration	100
Door Application	Wooden & Security Door	Password Registration	100
Battery	Lithium Battery	Smart Key Tag	4
Door Thickness	36 - 110mm	Mechanical key	2
Working Humidity	20%-80%	Emergency power Interface	Micro-USB
Working Temperature	60° c +- 10° c	Doorbell	Yes

1.2 System Initialisation





Use a paper clip, slot into the small hole press, and hold for 5sec to Reset.

1.3 Emergency Key





Flip up the cover at the front panel, can see the mechanical key cylinder. Use key to unlock when necessary.

1.4 Technical Drawing

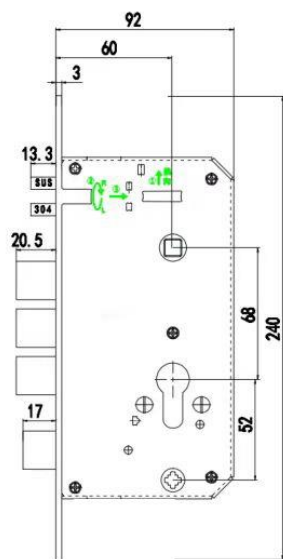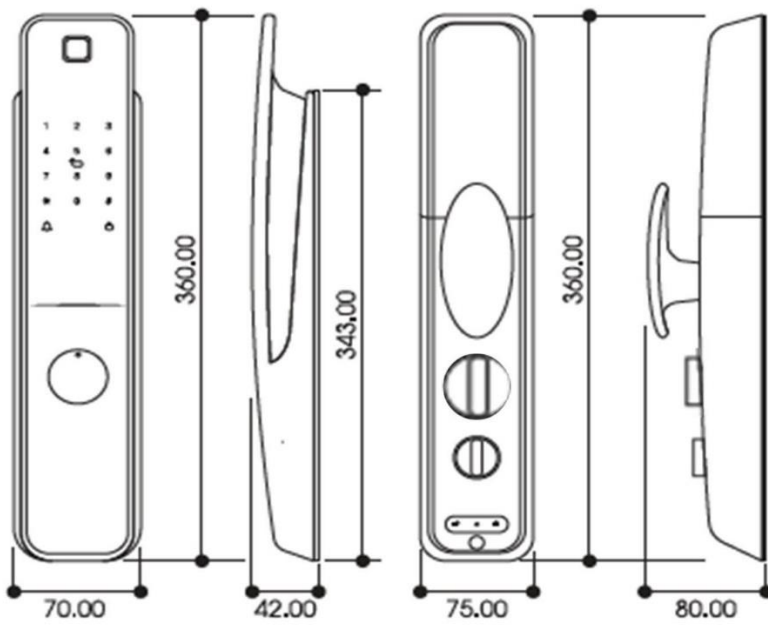

For Wooden Door

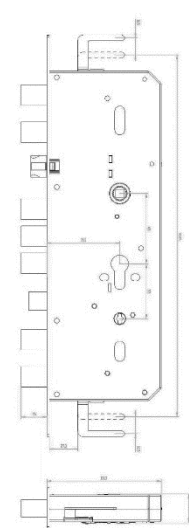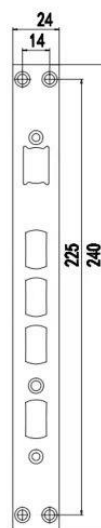

For Security Door

2) Smart Living App

2.1 Download


You can search for HAFELE Smart Living App in various app stores or scan the QR code above to download



**HÄFELE
SMART LIVING**



2.1 Registration

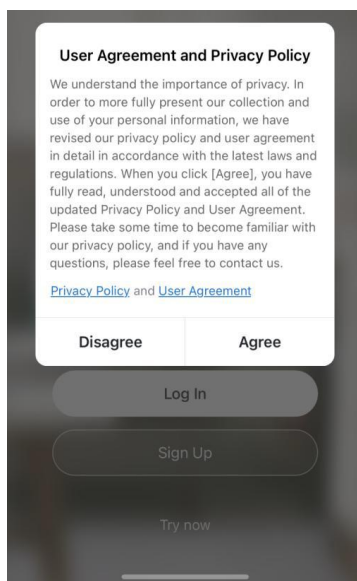

1. Click "Sign Up "and read the Privacy Policy after it pops up. Click "Agree" and enter the registration page.

2. You can use email or mobile number as your account to register. The country/region of the APP will be the same as the phone's. You can also change it by yourself when registering. (You cannot change the country/region after the registration). Enter mobile number/email and click "Get Verification Code".

3. Enter the verification code and turn to the password setting page. Set your password as required and click "Done".

2.2 Login Account




login with an existing account

If you already have an account, choose "Register with Existing Account "and enter the log in page. The system will automatically locate the current country/region you are in. Or you can choose the country/region by yourself.

3) App Operation



3.1 Pair with Lock

- Touch on the screen.
- Select Language: Press 1+# to select Chinese, press 2+# to select English.
(you must select a language before you can start Bluetooth)
- On App, click 'Add device' or '+' on the top right corner.
- Specific prompt up, click 'Add' to continue.
(make sure Bluetooth is turn on)
- Change lock's name & click 'Done' to completed.

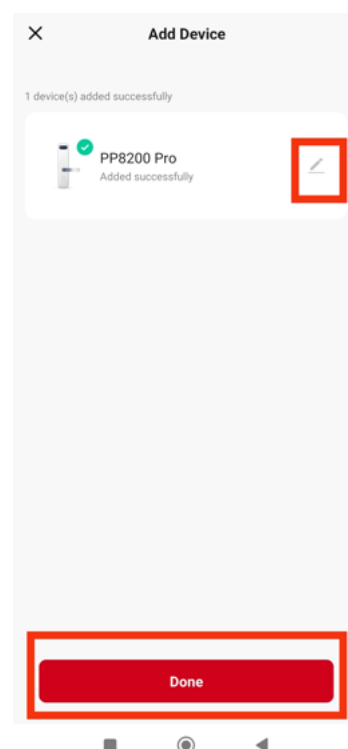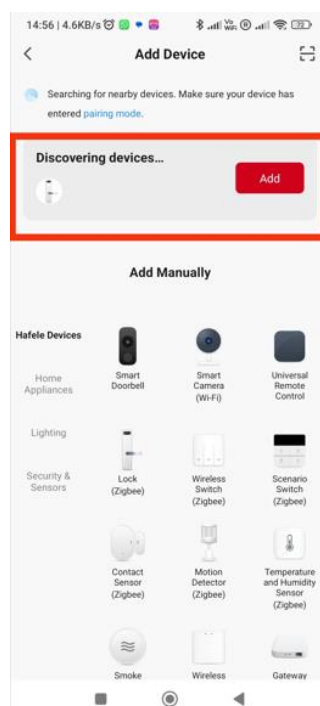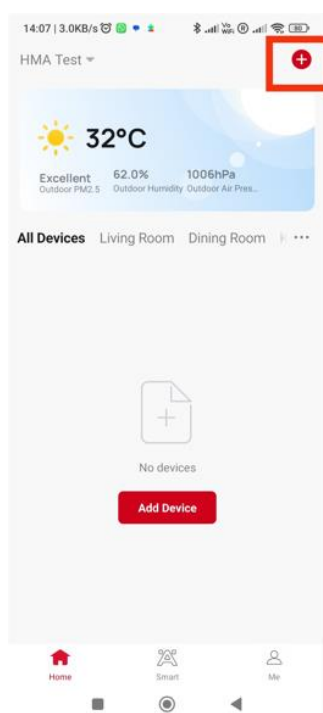

3.2 Member & Management





- Select 'Family', Click '+' to add family members.
(make sure all the member already registered an account).
- Choose to authorize as Administrator or Common Member
- Select member & setup fingerprints, passwords, and card individually.

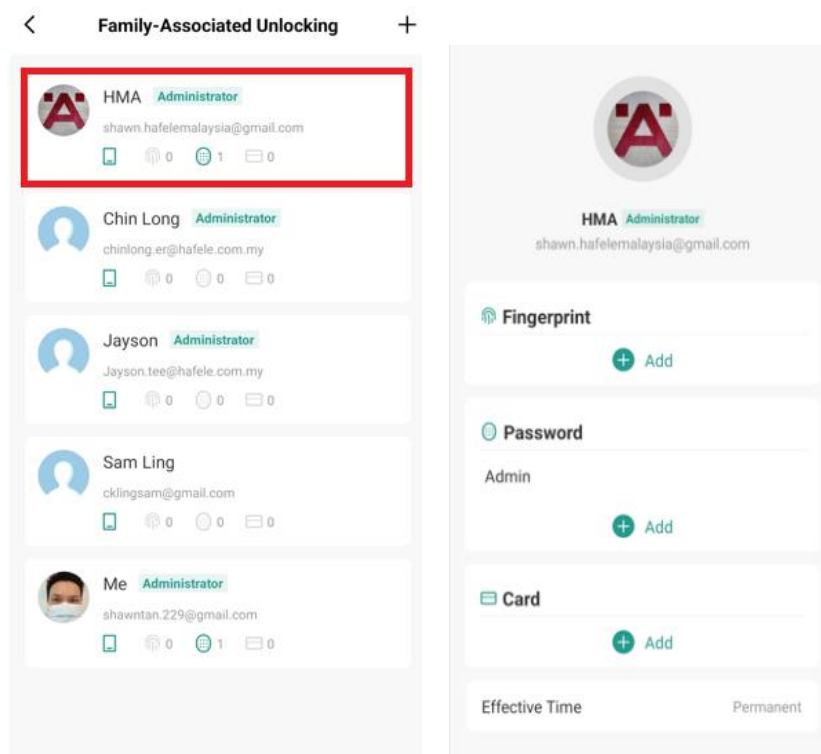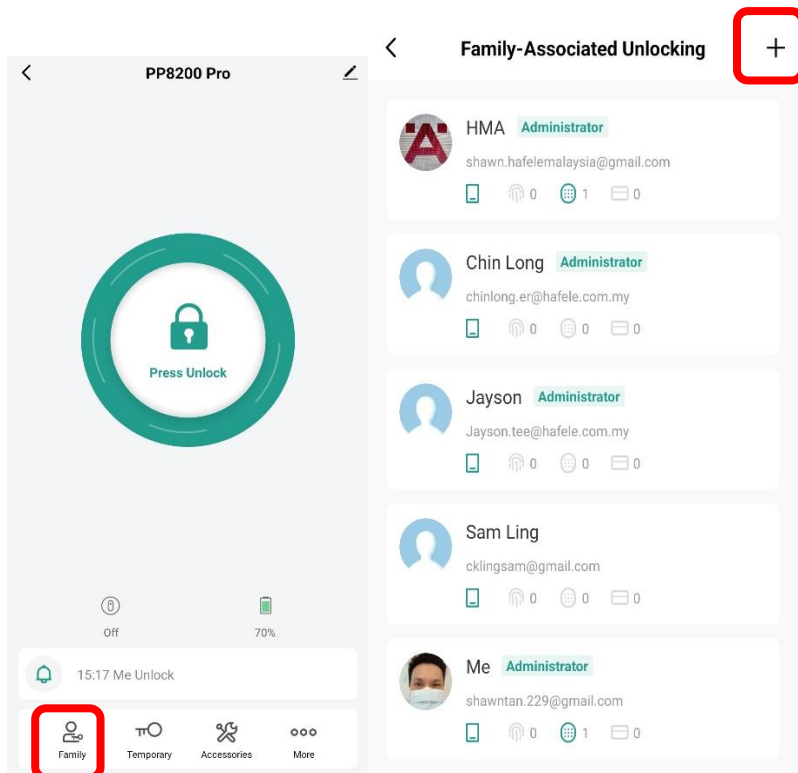

3.3 Temporary Password


- Select 'Temporary'
- Choose the type of password.
- Click 'Obtain Password' to continue or key in 6–10-digit password (custom type).
- Save / share the password to the correct person.

Notes: To protect privacy and security, the passcode will not be displayed on the app. Please save the password / share to the correct person on time.

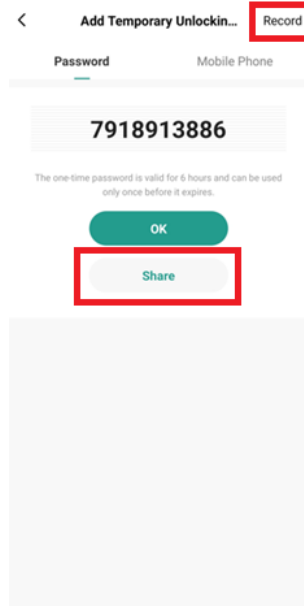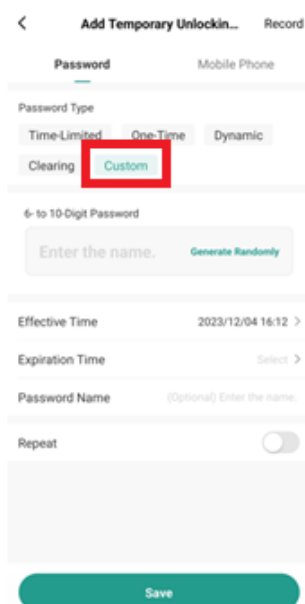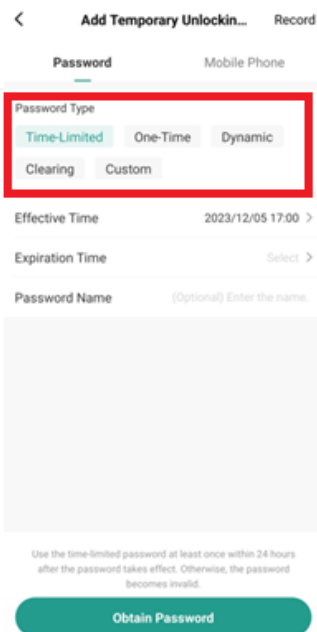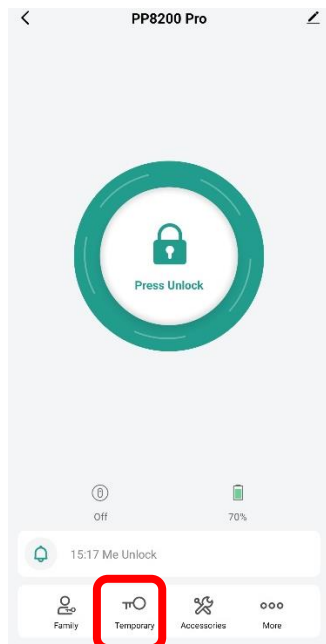

3.4 Others

- a) Select 'more' to set the lock volume, door lock language, etc.

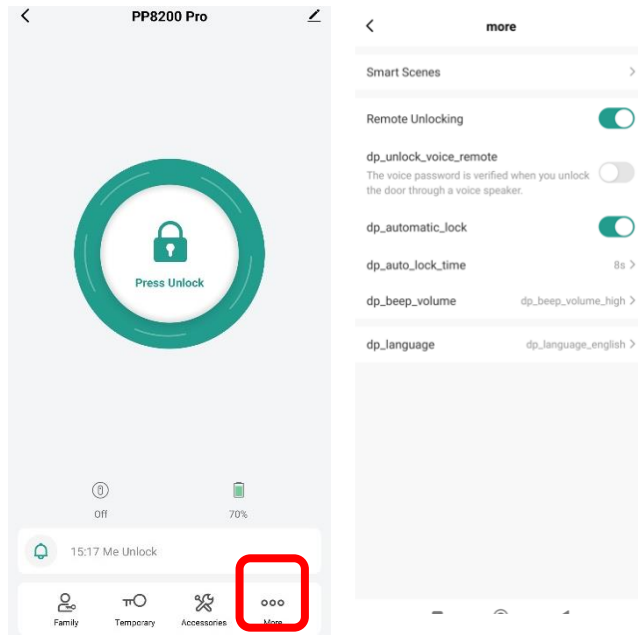

4) Small tips

4.1 How to keep your Lithium Battery longer life span.

- a) Please use a suitable adapter (Output 5V/2A) to charge the lithium battery.
- b) Suggest charging the battery every 3 months.
- c) Not recommend/ Do Not charge the battery directly from the wall socket with USB port.

4.2 Emergency power supply – Micro USB

- a) When the battery voltage is too low, cannot unlock from outside, connect a 5v via Micro USB

5) Setting from Lock

- a) Press * + # and enter (Administrator password) + #
(The administrator password needs to be set on the APP)
- b) Enter (function code) + #
(according to the function code list)
- c) Please perform relevant operations according to the door lock prompts.

Function code list

(1) No. 85 - Create user password/ fingerprint/ card

(2) No. 69 - Delete all cards

(3) No. 70 - Delete all fingerprints

(4) No. 71 - Delete all passwords

(5) No. 10 - Modify passwords

(6) No. 90 - Set rotation time

** The rotation time is the maximum time for the switch lock to rotate the motor.

(Adjustable range is 4-10 seconds.)

(7) No.91 - Set rotation delay

** The rotation delay is the delay time for the rebound of the oblique shot after the lock is unlocked.

(Adjustable range is 3-10 seconds.)

(8) No.92 - Set motor direction

(9) No.93 - Set motor torque

(10) No.30 - Set anti-pry alarm function

Example: Add user password

Touch the screen, press * + #,

➔ input Administrator Password + #

➔ input 85 + #

➔ input User Password + #

➔ Input again User Password + #